

REMOTE → MULTIDECKS

Gerlach 2.0 RDGH-H2/H3/H4 DVO



STANDARD FEATURES

- working temperature: from 0°C to 2°C
- refrigerant: R744
- natural defrosting
- 2 x NTC temperature probe
- siphoned condensate drains
- exposition: zinc-plated steel, powder coated in white (RAL 9003)
- 4 rows of suspended shelves, on shelves and on air inlet price holders 39 mm
- lighting: top, LEDit, color NW-4
- color of the base – black (RAL 9005)
- grey PVC bumper on the front of the unit




OPTIONS

- electronic expansion valve
- sidewalls



Gerlach 2.0 RDGH-H2 2500 DVO

DVO — door | double, straight (High Vision) | hinged

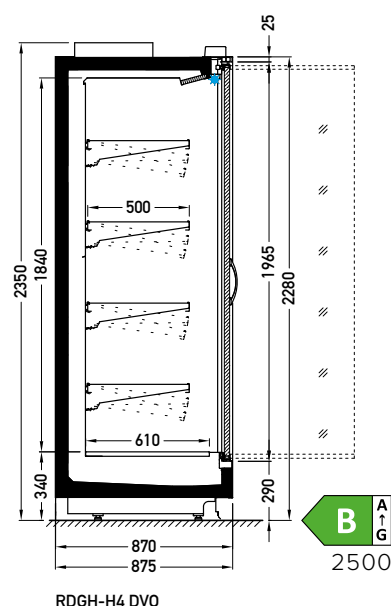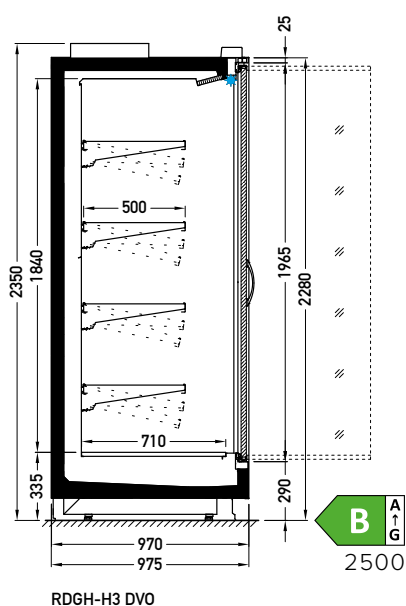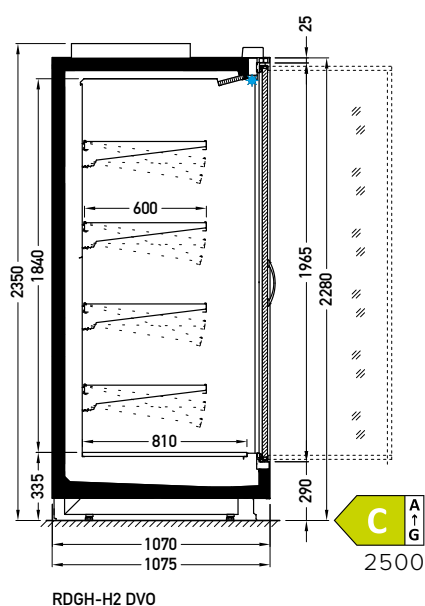

AVAILABLE MODULES

1250 1875 2150 2500 3750

JBG-2 Sp. z o.o. reserves the right to change the standards of devices or to withdraw products without prior notice.

Designation of the energy efficiency class is dedicated to a particular products, which are presented on each page of the catalogue. Indicated energy efficiency class depends on a module type, equipment, glassing version and type of a refrigerant. Amendment of each of the said parameters may cause amendment of the energy efficiency class. Contact the producer to acknowledge the energy efficiency class for the product with different parameters to those presented in the catalogue.

REMOTE → MULTIDECKS

Gerlach 2.0 RDGH-H2/H3/H4 XXX



STANDARD FEATURES

- working temperature: from 0°C to 2°C
- refrigerant: R744
- natural defrosting
- 2 x NTC temperature probe
- siphoned condensate drains
- exposition: zinc-plated steel, powder coated in white (RAL 9003)
- 4 rows of suspended shelves, on shelves and on air inlet price holders 39 mm
- lighting: top, LEDit, color NW-4
- color of the base – black (RAL 9005)
- grey PVC bumper on the front of the unit
- mechanical night blind


OPTIONS

- electronic expansion valve
- sidewalls




Gerlach 2.0 RDGH-H2 2500 XXX


DVO — door I double, straight (High Vision) I hinged

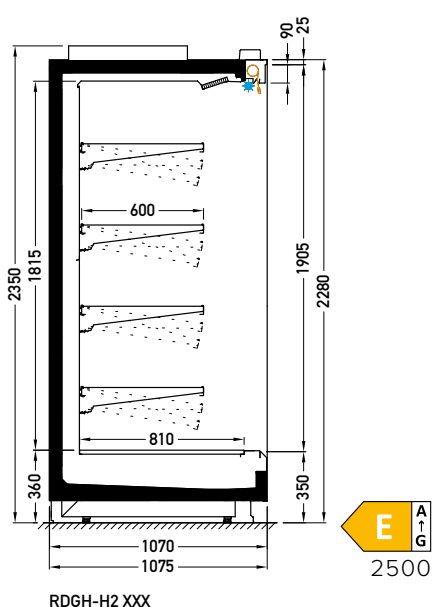

RDGH-H2 XXX

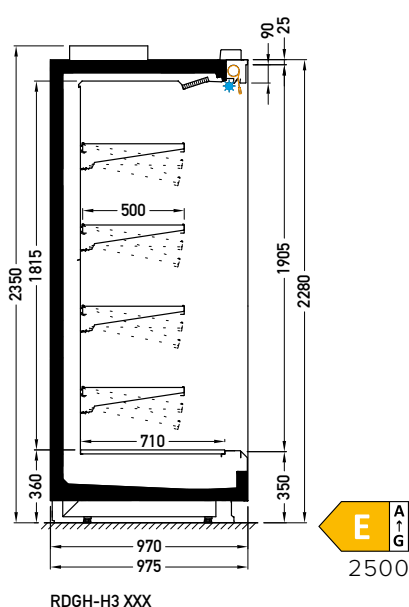

RDGH-H3 XXX

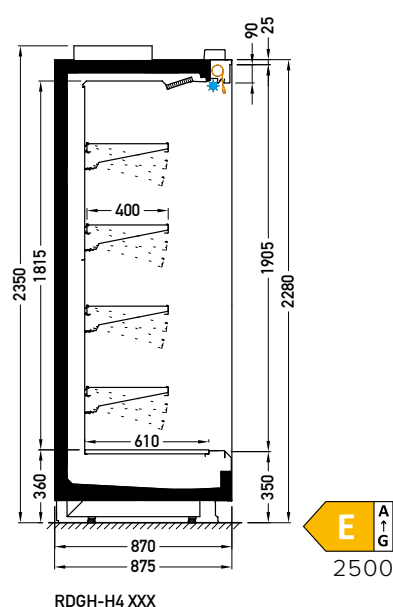

RDGH-H4 XXX

AVAILABLE MODULES

1250 1875 2150 2500 3750

JBG-2 Sp. z o.o. reserves the right to change the standards of devices or to withdraw products without prior notice.

Designation of the energy efficiency class is dedicated to a particular products, which are presented on each page of the catalogue. Indicated energy efficiency class depends on a module type, equipment, glassing version and type of a refrigerant. Amendment of each of the said parameters may cause amendment of the energy efficiency class. Contact the producer to acknowledge the energy efficiency class for the product with different parameters to those presented in the catalogue.